


CR-54747

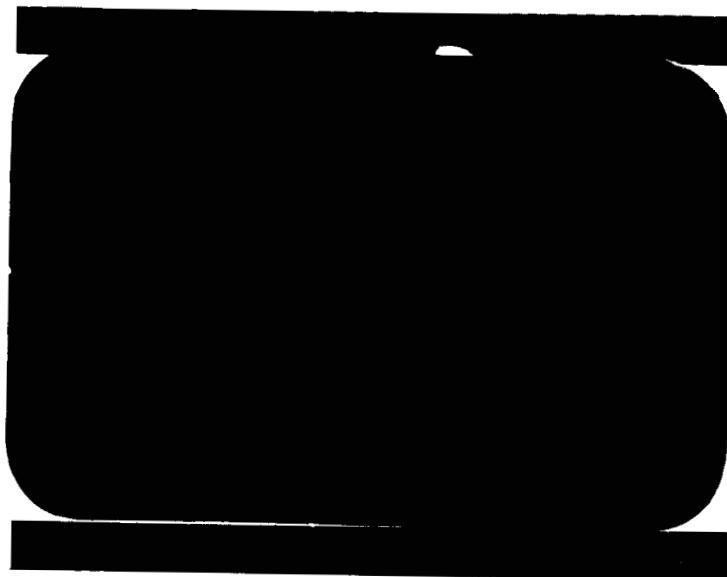


FACILITY FORM 602

N66-22932

— (ACCESSION NUMBER)  
20 (PAGES)  
CR-54747 (NASA CR OR TMX OR AD NUMBER)

— (THRU)  
— (CODE)  
17 (CATEGORY)

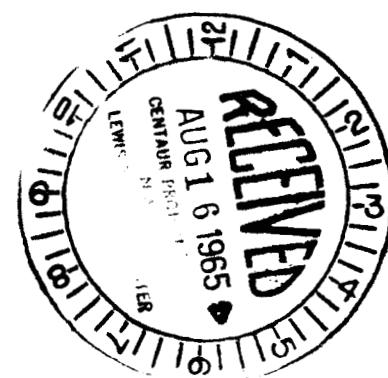

G|||||D  
**GENERAL DYNAMICS**  
**ASTRONAUTICS**  
NOW COMBINED WITH CONVAIR

A2136-1 (REV. 6-61)

GPO PRICE \$ \_\_\_\_\_

CFSTI PRICE(S) \$ \_\_\_\_\_

Hard copy (HC) 1.00

Microfiche (MF) .50

THE EFFECTS OF COLD ROLLING ON THE  
NOTCHED AND UNNOTCHED TENSILE PROPERTIES  
OF TYPE 310 STAINLESS STEEL AT + 75°F,  
-320°F, AND -423°F

MRG - 293  
February 2, 1962

Prepared by: J. D. Gruner

GENERAL DYNAMICS/CONVAIR

2 February 1962

**SUBJECT:** The Effects of Cold Rolling on the Notched and Unnotched Tensile Properties of Type 310 Stainless Steel at +75°F, -320°F, and -423°F

*N66-22932*

**ABSTRACT:** The effects of various degrees of cold rolling on the notched and unnotched longitudinal and transverse tensile properties of Type 310 stainless steel sheet were determined at +75°F, -320°F and -423°F. Test results showed that this material exhibits good notched toughness at cryogenic temperatures. The notch toughness at -320°F and -423°F improved with increased cold rolling until a maximum was reached at approximately 60% reduction. Further cold working decreased the low temperature notch toughness.



Prepared by

*V. D. Gruner*  
V. D. Gruner

Approved by

*A. Hurlich*  
A. Hurlich  
Research Group Engineer  
Materials Research Group

AH:JDG:jn

## Distribution:

V. A. Babits	592-0
J. A. Fager	541-3
E. R. Foer	290-2
R. S. Shorey	597-3
W. Gross	563-1
W. Norris	541-3
L. Cox	597-3
W. Beyers	290-2
H. E. Micken	290-3

9 February 1962

TO: Distribution  
FROM: Materials Research Group, 592-1  
SUBJECT: The Effects of Cold Rolling on the Notched and Unnotched Tensile Properties of Type 310 Stainless Steel at +75°F, -320°F and -423°F

BACKGROUND & PURPOSE:

A test program was conducted to determine the effects of various degrees of cold rolling on the low temperature notched and unnotched tensile properties of 310 stainless steel. The purpose of this report is to present the findings of this program.

PROCEDURE:

Notched and unnotched longitudinal and transverse tensile specimens were machined from each thickness of originally annealed 0.080" sheet that was reduced by cold rolling to 0.070", 0.050", 0.030" and 0.016" in thickness. Tensile tests were conducted at room temperature (+75°F), -320°F and -423°F. The latter two temperatures were obtained by immersing the specimens in liquid nitrogen and liquid hydrogen respectively.

A complete chemical analysis was made of the material. Microscopic specimens were prepared and examined from the 0.080" and 0.016" material.

RESULTS & DISCUSSIONS:

Results of the chemical analysis are given in Table I. The chemical composition of the material tested was within the limits specified for Type 310 stainless steel in AMS 5521B. In addition to the elements specified in AMS 5521B the amount of nitrogen was determined. The effects of nitrogen in austenitic stainless are generally similar to those of carbon.

The mechanical properties determined by the smooth and notched tensile tests are compiled in Table II and plotted against the amount of cold work in Figures 1, 2, 3 and 4. Figure 1 was plotted for longitudinal and transverse properties at +75°F, Figure 2 for these properties at -320°F and Figures 3 and 4 for these properties at -423°F.

Examination of Figures 2, 3 and 4 show the annealed material at -320°F and the annealed and 0.070" thickness material (12.5% cold reduction) at -423°F to have a notched unnotched tensile ratio of somewhat less than unity. The notched tensile fractures of these specimens were ductile in appearance and contained distinct shear lips. This indicates that the material did not fail in a brittle manner even though the

9 February 1962

notched-unnotched ratio was below unity.

Further examination of Figures 1, 2, 3 and 4 show that the notched-unnotched tensile ratio improves significantly with cold reduction until a maximum is reached, then decreases with further cold working. This maximum varies, depending on the temperature and the grain direction. The optimum toughness at low temperatures, considering both grain direction and temperature, appears to be at approximately 60% cold reduction.

Figures 2, 3 and 4 also show the low temperature transverse notched-unnotched tensile ratio of the annealed material to be slightly lower than the longitudinal ratio. In all but the 0.050" thickness material (37.5% reduction) at -320°F the transverse notched-unnotched tensile ratios of the cold worked material were higher than the longitudinal ratios at -320°F and -423°F. The room temperature transverse notched-unnotched tensile ratio was less than the longitudinal ratio at all degrees of cold reduction with the exception of the 0.070" material (12.5% reduction).

At the present time there is no clear cut explanation as to why at low temperatures the notched-unnotched tensile ratio increases with cold working until a maximum is reached, then declines with further cold working. This same phenomenon has been observed in other 300 series stainless steels, particularly in Type 301.

The microstructures of the annealed (0.080") material and the most severely reduced (0.016") material are shown in Figures 5 through 8. Etching this material with electrolytic sodium cyanide revealed the presence of discontinuous networks of grain boundary carbides, see Figures 9 and 10, in the annealed 0.080" material. The mechanical property data show that this material has good notched toughness at extreme low temperature even though these carbides were present. In the severely cold worked 0.016" material, the carbides occurred in streaks of globular carbides elongated in the direction of cold work, see Figures 11 and 12.

#### SUMMARY:

Although the amount of data from this test program are limited the following conclusions can be made: a) using the notched-unnotched tensile ratio as a basis, cold worked Type 310 stainless steel exhibits good longitudinal and transverse toughness at room temperature, -320°F and -423°F. b) The notched toughness of this material at -320°F and -423°F improves significantly with cold working and reaches an optimum value at approximately 60% cold reduction. Further cold working decreases the notch toughness. This indicates that cold working up to 60% reduction not only increases the strength of Type 310 stainless steel but also increases its resistance to brittle behavior at extreme low temperatures.

9 February 1962

c) Type 310 stainless steel sheet in the cold rolled condition exhibits relatively little directionality in strength, ductility, and toughness properties. Other stainless steels, notably Type 301, exhibit considerable directionality, with markedly reduced toughness in the transverse direction.

TABLE I

The chemical composition of 310 stainless steel from Heat No. 43631, Washington Steel Corp., Washington, Pa.

	%C	%N2	%Mn	%P	%S	%Si	%Cr	%Ni	%Cu	%Mo
AMS	.08		2.00	.040	.030	.75	24.00	19.00	.50	.50
5521B	Max		Max	Max	Max	Max	26.00	22.00	Max	Max
Test Results	.07	.06	1.64	.026	.015	.52	24.27	20.34	.20	.24

9 February 1962

TABLE II

## Low Temperature Mechanical Properties of 310 Stainless Steel at Various Degrees of Cold Rolling

Thickness	% Coldwork	Test Temp.	Grain Direction	F <sub>ty</sub> KSI	F <sub>tu</sub> KSI	% Elong	Notched F <sub>tu</sub> KSI	Notch/Unnotched Ratio
.080	0	+78°F	Long	40.3	85.8	46.0	93.9	1.09
.080	0	+78°F	Trans	34.8	86.8	46.0	91.6	1.05
.080	0	-320°F	Long	86.8	163.9	71.0	155.0	
.080	0	<u>-320°F</u>	<u>Long</u>	<u>86.2</u>	<u>163.0</u>	<u>71.5</u>	<u>155.8</u>	
Avg.		-320°F	Long	86.5	163.5	71.3	155.4	0.95
.080	0	-320°F	Trans	89.2	164.1	69.5	151.3	
.080	0	<u>-320°F</u>	<u>Trans</u>	<u>90.3</u>	<u>165.5</u>	<u>73.0</u>	<u>150.8</u>	
Avg.		-320°F	Trans	89.8	164.8	71.3	151.1	0.92
.080	0	-423°F	Long	114.0	196.2	54.5	182.3	
.080	0	<u>-423°F</u>	<u>Long</u>	<u>112.5</u>	<u>195.9</u>	<u>50.0</u>	<u>182.5</u>	
Avg.		-423°F	Long	113.3	196.1	52.3	182.4	0.93
.080	0	-423°F	Trans	115.8	197.3	54.0	179.0	
.080	0	<u>-423°F</u>	<u>Trans</u>	<u>117.1</u>	<u>187.8</u>	<u>34.5</u>	<u>178.2</u>	
Avg.		-423°F	Trans	116.5	197.1	44.3	178.6	0.91
.070	12.5	+78°F	Long	87.6	100.2	24.0	114.9	1.15
.070	12.5	+78°F	Trans	88.9	100.6	21.5	119.5	1.19
.070	12.5	-320°F	Long	130.4	182.7	53.0	186.4	
.070	12.5	<u>-320°F</u>	<u>Long</u>	<u>131.2</u>	<u>181.7</u>	<u>49.0</u>	<u>186.2</u>	
Avg.		-320°F	Long	130.8	182.2	51.0	186.3	1.02
.070	12.5	-320°F	Trans	122.5	179.8	52.5	188.3	
.070	12.5	<u>-320°F</u>	<u>Trans</u>	<u>123.6</u>	<u>180.7</u>	<u>55.0</u>	<u>184.6</u>	
Avg.		-320°F	Trans	123.1	180.3	53.8	186.5	1.03
.070	12.5	-423°F	Long	156.6	221.3	43.0	212.1	
.070	12.5	<u>-423°F</u>	<u>Long</u>	<u>154.7</u>	<u>220.4</u>	<u>42.0</u>	<u>213.2</u>	
Avg.		-423°F	Long	155.7	220.9	42.5	212.7	0.96
.070	12.5	-423°F	Trans	138.3	215.8	43.5	211.3	
.070	12.5	<u>-423°F</u>	<u>Trans</u>	<u>149.6</u>	<u>214.6</u>	<u>40.5</u>	<u>209.6</u>	
Avg.		-423°F	Trans	144.0	215.2	42.0	210.5	0.98

9 February 1962

TABLE II (continued)

Thickness	% Coldwork	Test Temp.	Grain Direction	Fty KSI	Ftu KSI	% Elong.	Notched Ftu KSI	Notched/Unnotched Ratio
.050	37.5	+78°F	Long	125.1	139.0	8.5	166.9	1.20
.050	37.5	+78°F	Trans	126.4	140.4	8.5	167.2	1.19
.050	37.5	-320°F	Long	164.6	207.3	30.5	236.3	
.050	37.5	<u>-320°F</u>	<u>Long</u>	<u>159.9</u>	<u>208.2</u>	<u>32.0</u>	<u>236.8</u>	
	Avg.	-320°F	Long	162.3	207.8	31.3	236.6	1.14
.050	37.5	-320°F	Trans	168.6	208.1	31.5	234.9	
.050	37.5	<u>-320°F</u>	<u>Trans</u>	<u>161.9</u>	<u>208.2</u>	<u>29.5</u>	<u>234.5</u>	
	Avg.	-320°F	Trans	165.3	208.2	30.5	234.7	1.13
.050	37.5	-423°F	Long	191.7	243.2	31.0	261.3	
.050	37.5	<u>-423°F</u>	<u>Long</u>	<u>189.5</u>	<u>243.2</u>	<u>23.0</u>	<u>261.2</u>	
	Avg.	-423°F	Long	190.6	243.2	27.0	261.3	1.07
.050	37.5	-423°F	Trans	190.6	243.1	31.5	264.8	
.050	37.5	<u>-423°F</u>	<u>Trans</u>	<u>182.9</u>	<u>241.9</u>	<u>32.0</u>	<u>260.4</u>	
	Avg.	-423°F	Trans	186.8	242.5	31.8	262.6	1.08
.030	62.5	+78°F	Long	160.5	166.9	4.0	181.3	1.09
.030	62.5	+78°F	Trans	149.5	180.5	5.0	181.3	1.00
.030	62.5	-320°F	Long	210.9	235.7	18.5	262.9	
.030	62.5	<u>-320°F</u>	<u>Long</u>	<u>209.9</u>	<u>236.6</u>	<u>18.0</u>	<u>263.5</u>	
	Avg.	-320°F	Long	210.4	236.2	18.3	263.2	1.11
.030	62.5	-320°F	Trans	197.4	247.0	16.0	292.4	
.030	62.5	<u>-320°F</u>	<u>Trans</u>	<u>197.4</u>	<u>247.0</u>	<u>16.0</u>	<u>300.7</u>	
	Avg.	-320°F	Trans	197.4	247.0	16.0	296.6	1.20
.030	62.5	-423°F	Long	241.5	264.0	3.0	295.4	
.030	62.5	<u>-423°F</u>	<u>Long</u>	<u>237.7</u>	<u>275.6</u>	<u>17.5</u>	<u>297.4</u>	
	Avg.	-423°F	Long	239.6	269.8		296.4	1.10
.030	62.5	-423°F	Trans	224.5	279.4	14.5	317.7	
.030	62.5	<u>-423°F</u>	<u>Trans</u>	<u>222.9</u>	<u>280.7</u>	<u>17.0</u>	<u>324.4</u>	
	Avg.	-423°F	Trans	223.7	280.1	15.5	321.1	1.15
.016	80.0	+78°F	Long	171.4	186.8	2.0	199.4	1.07
.016	80.0	+78°F	Trans	162.3	210.3	3.5	209.8	1.00
.016	80.0	-320°F	Long	235.2	256.2	9.0	269.7	
.016	80.0	<u>-320°F</u>	<u>Long</u>	<u>236.2</u>	<u>254.7</u>	<u>9.0</u>	<u>264.7</u>	
	Avg.	-320°F	Long	235.7	255.5	9.0	267.2	1.05


9 February 1962

TABLE II (continued)


Thickness	% Coldwork	Test Temp.	Grain Direction	Fty KSI	Ftu KSI	% Elong.	Notched Ftu	Notched/KSI	Notched/Unnotched Ratio
.016	80.0	-320°F	Trans	245.6	286.3	10.0	327.8		
	80.0	<u>-320°F</u>	<u>Trans</u>				<u>307.1</u>		
	Avg.	-320°F	Trans	245.6	286.3	10.0	317.5		1.11
.016	80.0	-423°F	Long	255.6	294.6	6.5	315.1		
	80.0	<u>-423°F</u>	<u>Long</u>	<u>258.6</u>	<u>292.2</u>	<u>9.0</u>	<u>318.3</u>		
	Avg.	-423°F	Long	257.1	293.4	7.8	316.7		1.08
.016	80.0	-423°F	Trans	257.6	316.4	8.0	345.7		
	80.0	<u>-423°F</u>	<u>Trans</u>	<u>263.7</u>	<u>314.1</u>	<u>7.5</u>	<u>363.9</u>		
	Avg.	-423°F	Trans	260.7	315.8	7.8	354.8		1.13

9 February 1962

FIGURE 1

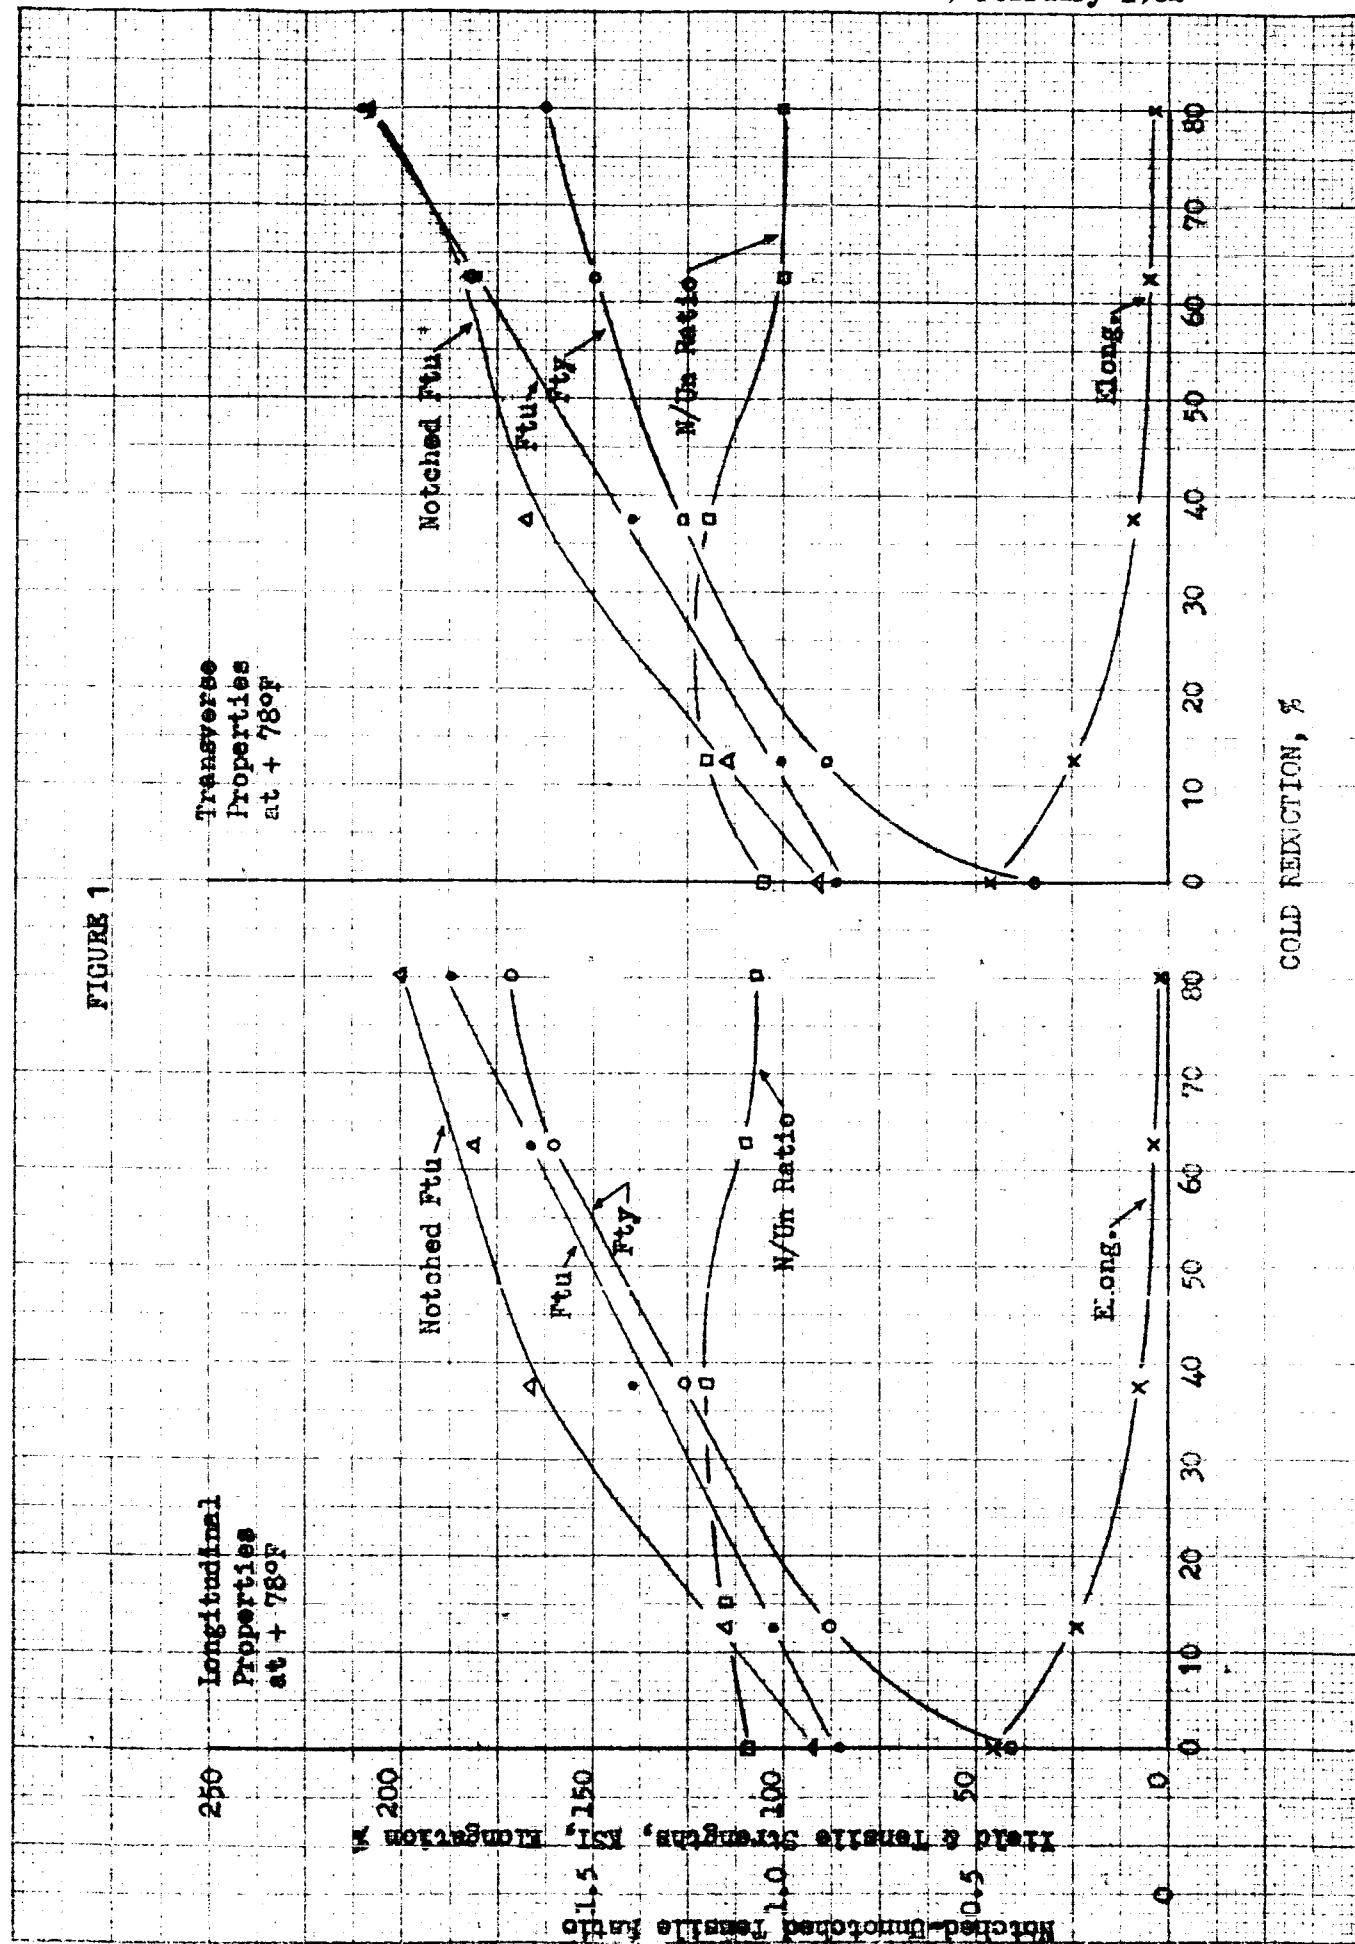


9 February 1962

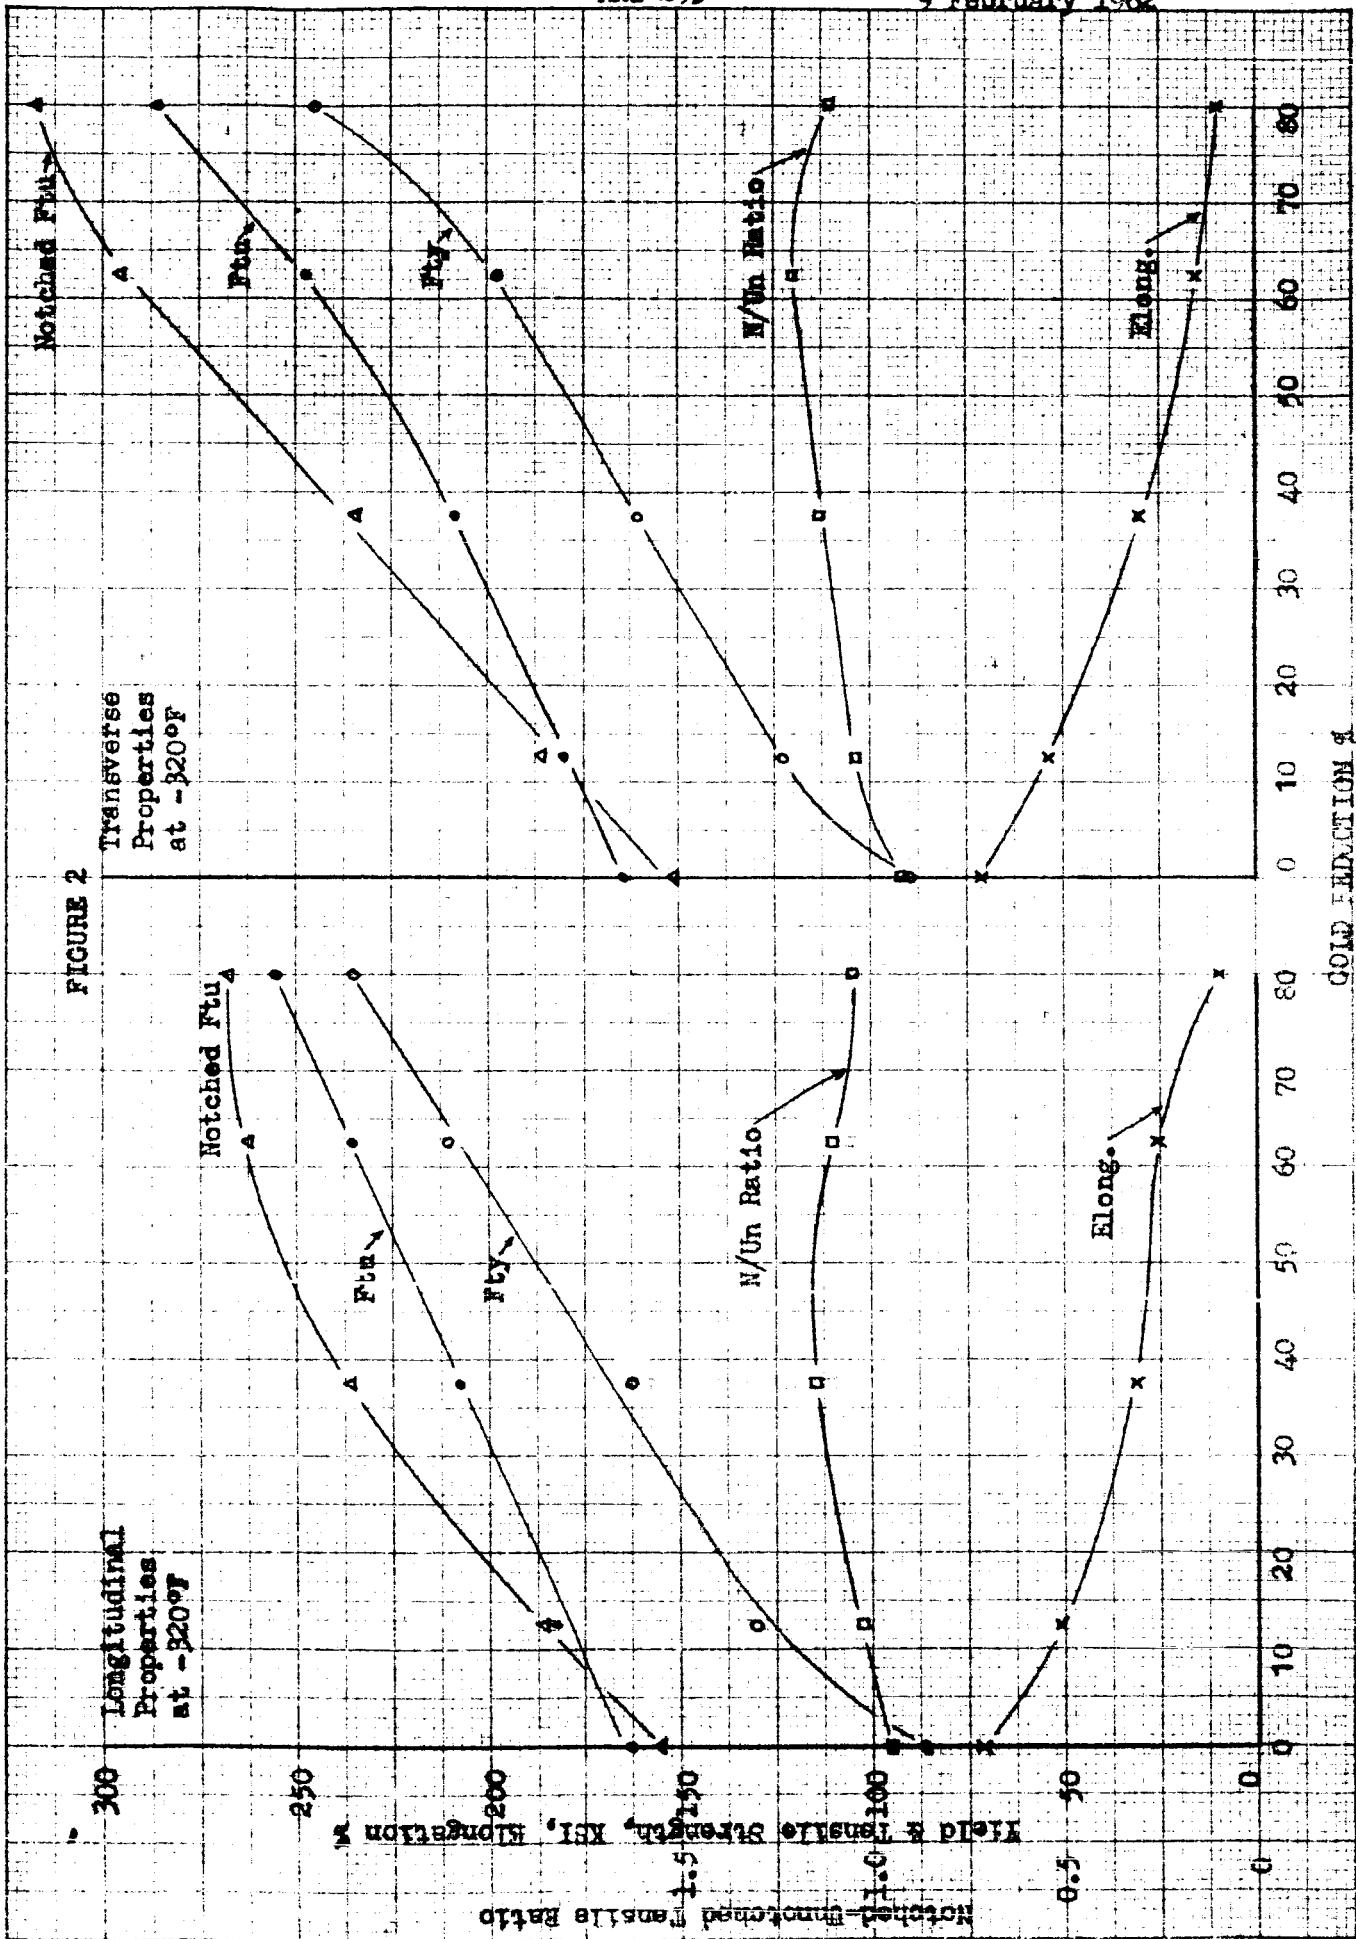


9 February 1962

FIGURE 3

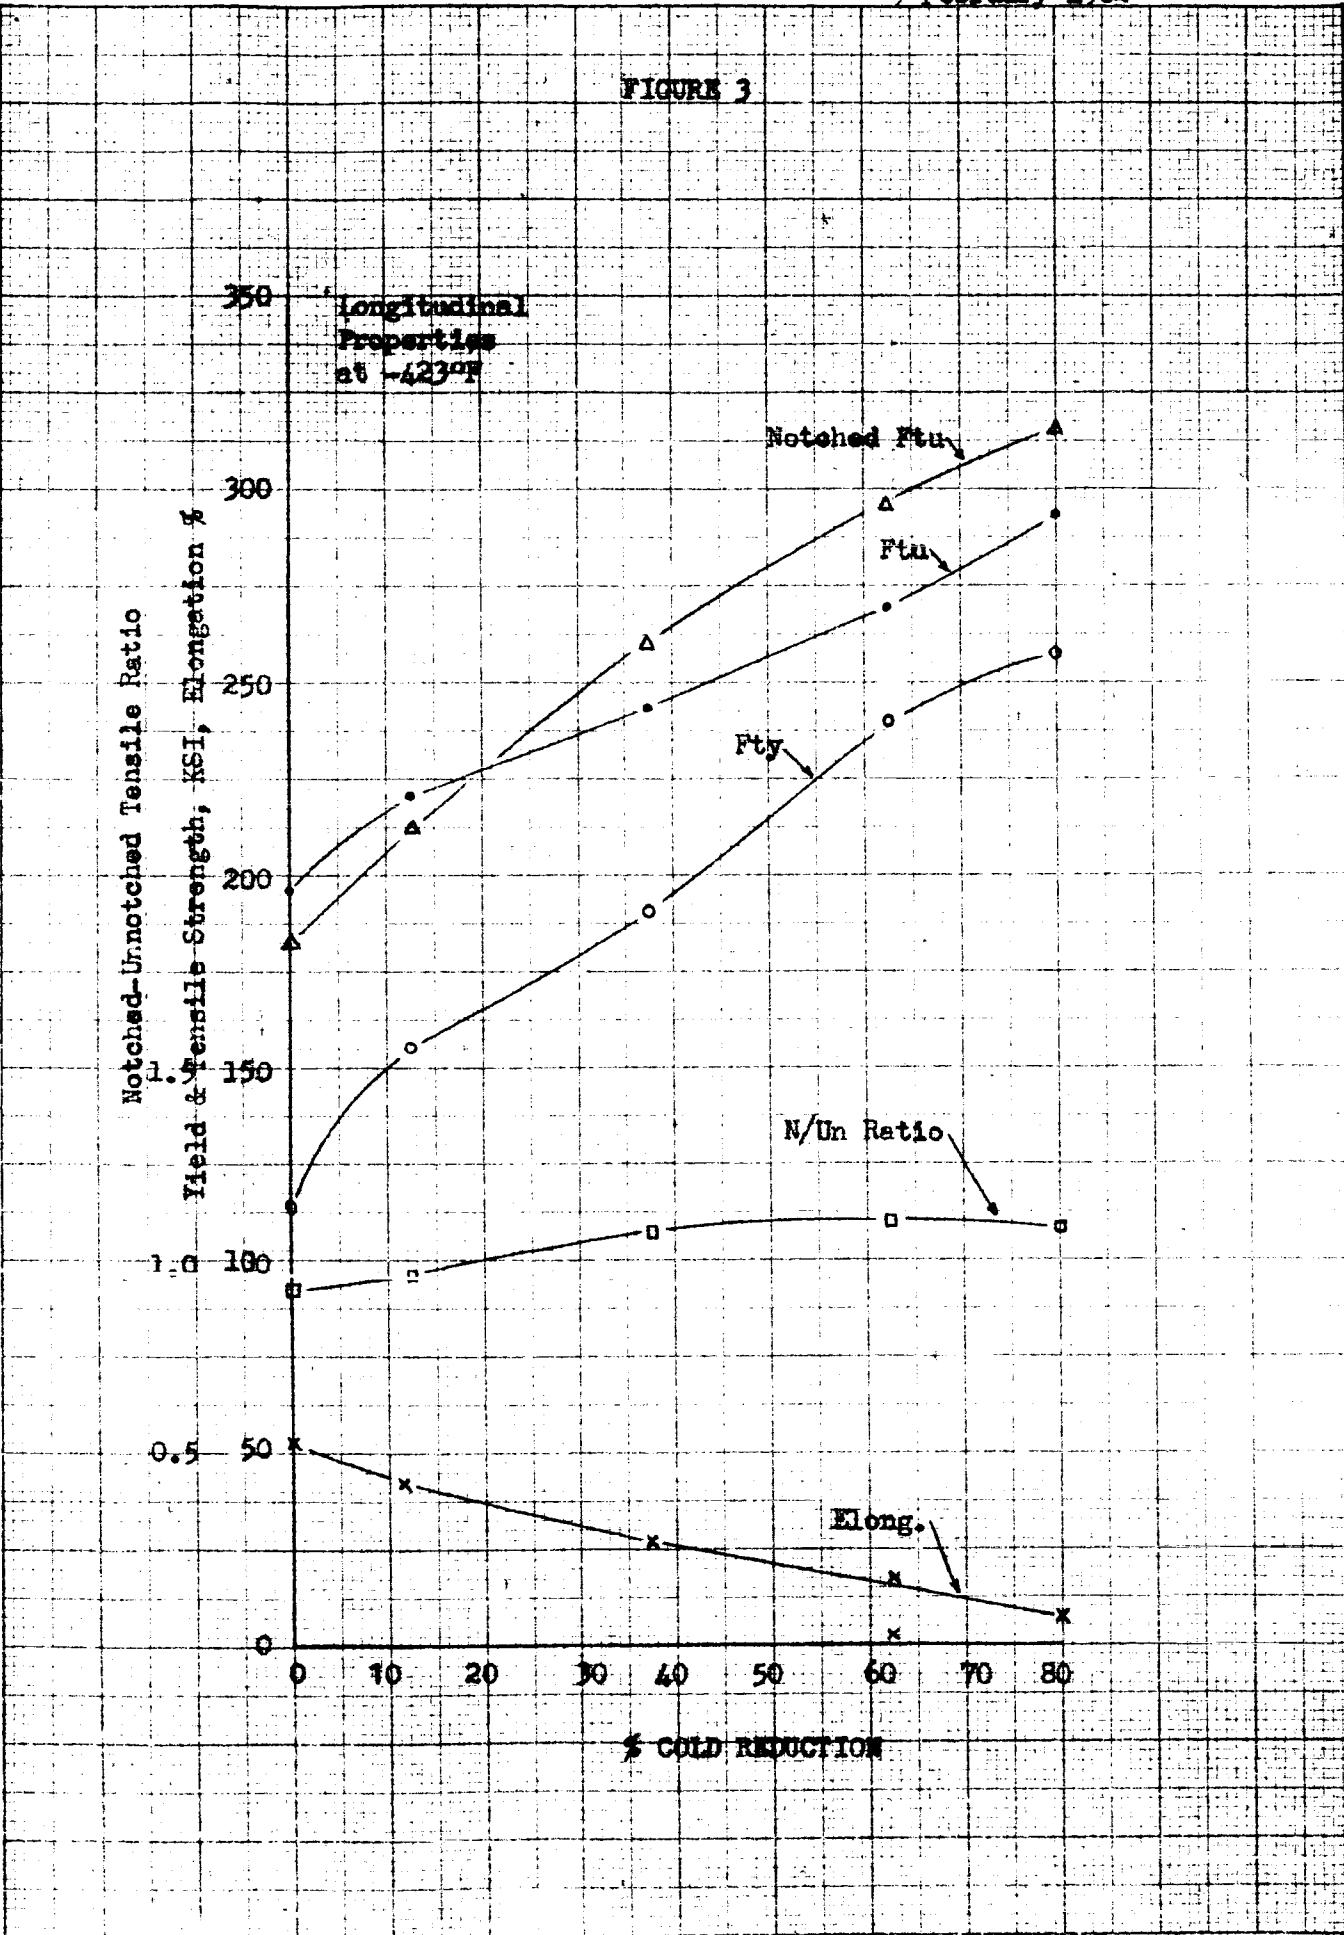

9 February 1962

FIGURE 4

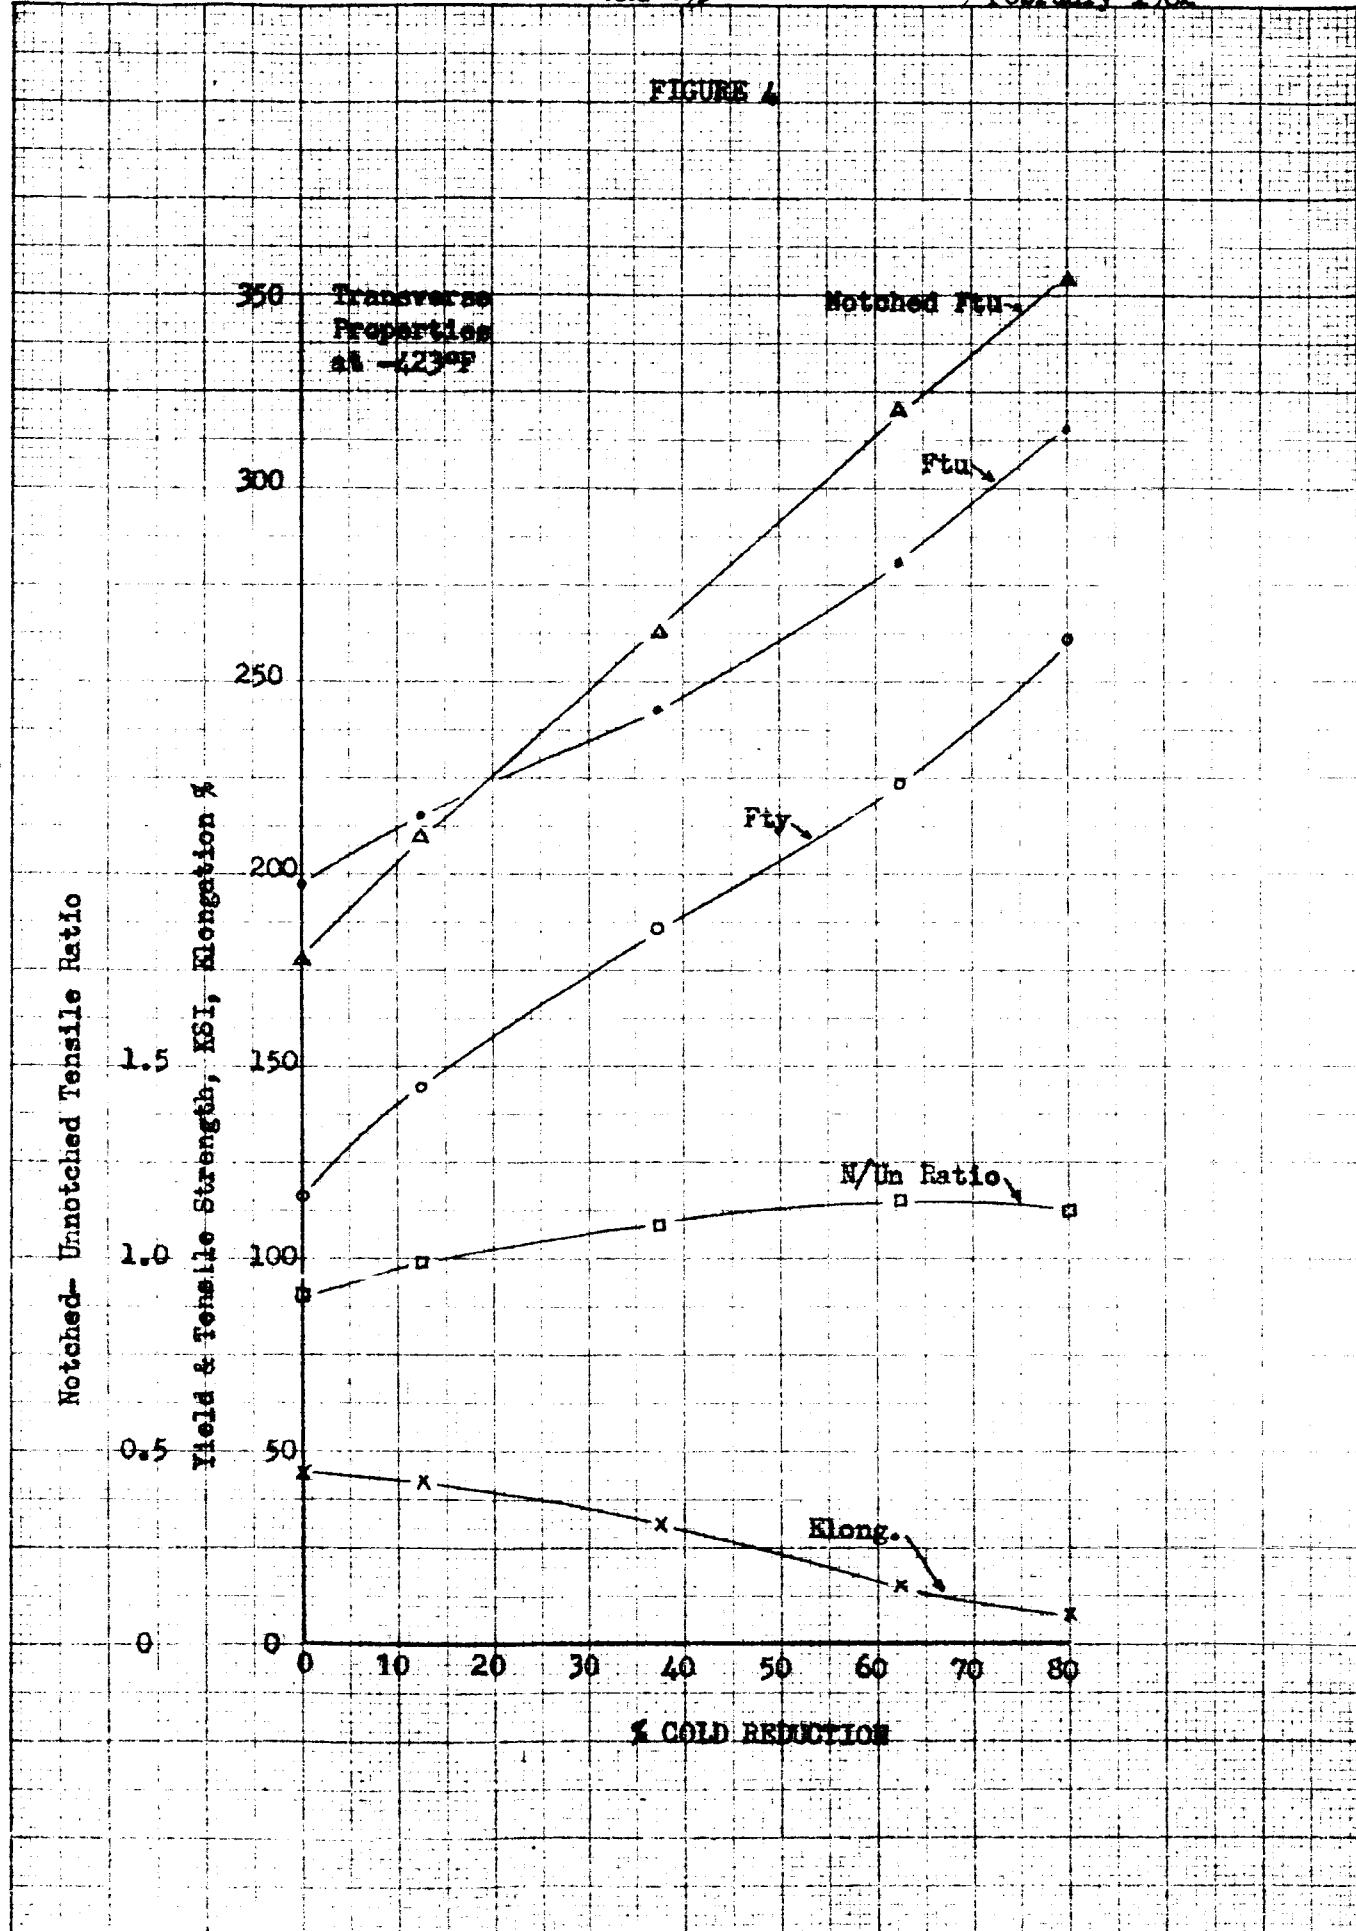

IRG-293

9 February 1962



100X Etched-Oxalic

FIGURE 5 - The microstructure of a longitudinal section of the annealed 0.080" thickness material. A relatively small amount of inclusions and foreign particles are visible in a recrystallized austenitic matrix.


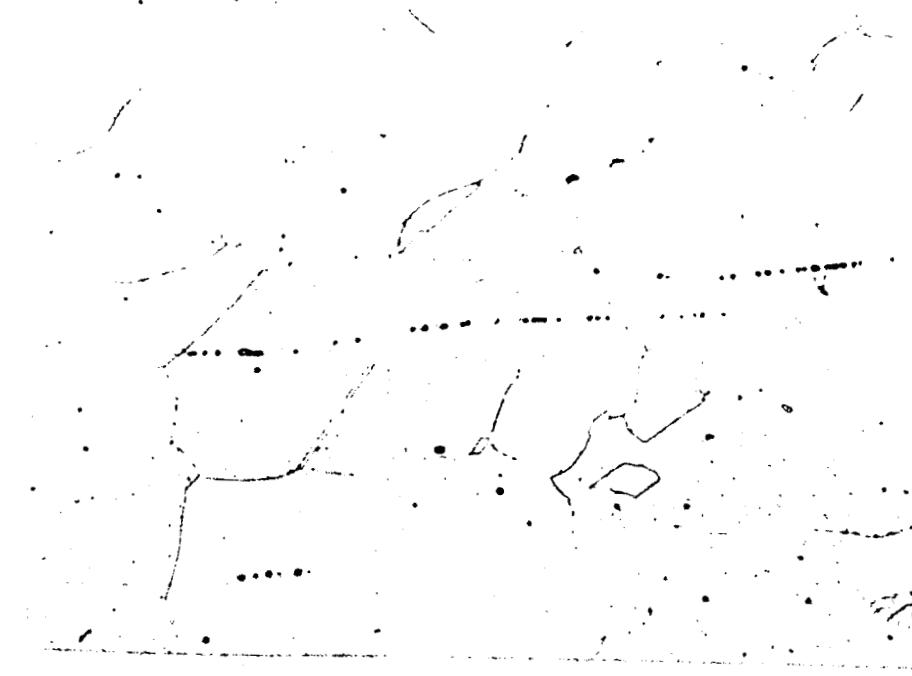


FIGURE 6 - A higher magnification view of the microstructure from the annealed .080" thickness material.


MRC-293

9 February 1962

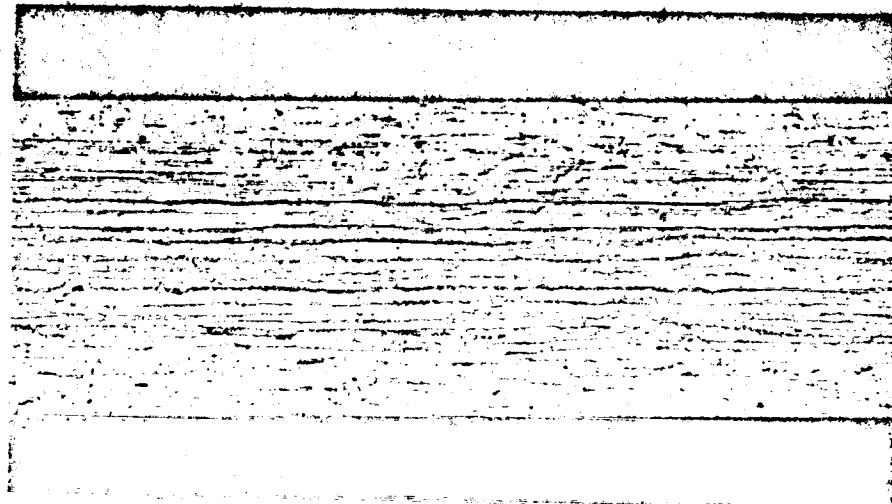

100X Etched-Oxalic

FIGURE 7 - The microstructure of a longitudinal section of the 0.016" thickness material. This material has been severely cold worked (80% reduction)

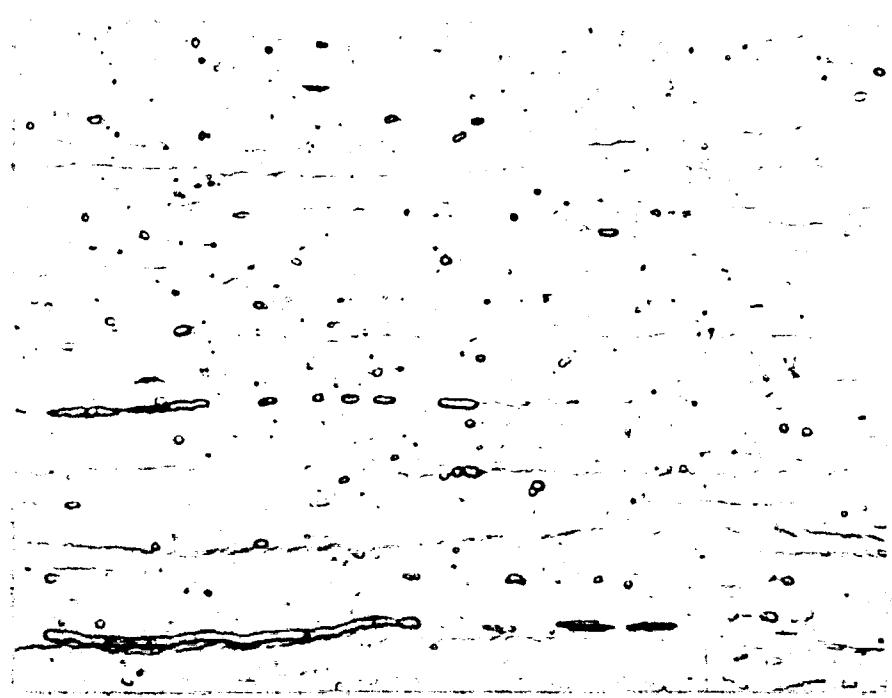

500X Etched-Oxalic

FIGURE 8 - A higher magnification of the microstructure of the 0.016" thickness material.

9 February 1962

## 100X Etched-Sodium Cyanide


FIGURE 9 - The presence of a discontinuous net work of grain boundary carbides, shown as dark lines, was determined by electrolytically etching with sodium cyanide.

## 500X Etched-Sodium Cyanide

FIGURE 10 - A higher magnification of the discontinuous network of grain boundary carbides revealed by the electrolytic sodium cyanide etch.

MPC-293

9 February 1962

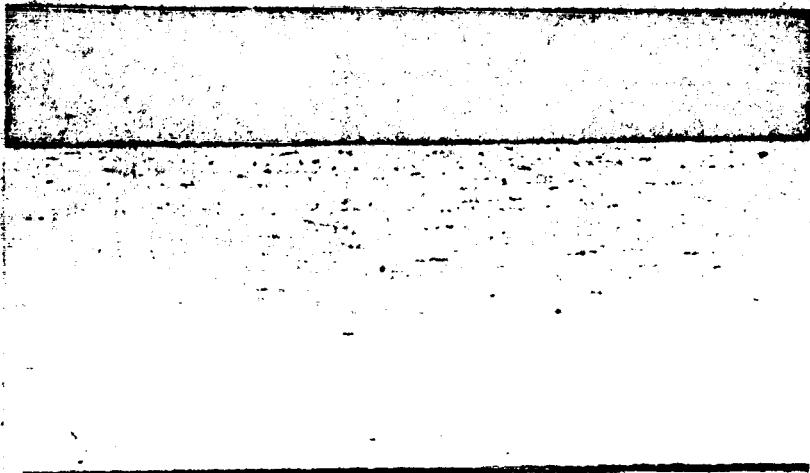

100X Etched-Sodium Cyanide

FIGURE 11 - A longitudinal cross section of the 0.016" material electrolytically etched with sodium cyanide. The network of globular carbides has been elongated in the direction cold work.

500 X Etched-Sodium Cyanide

FIGURE 12 - A higher magnification of the elongated network of globular carbides in the 0.016" material

